



XS Canalizzata 8kW

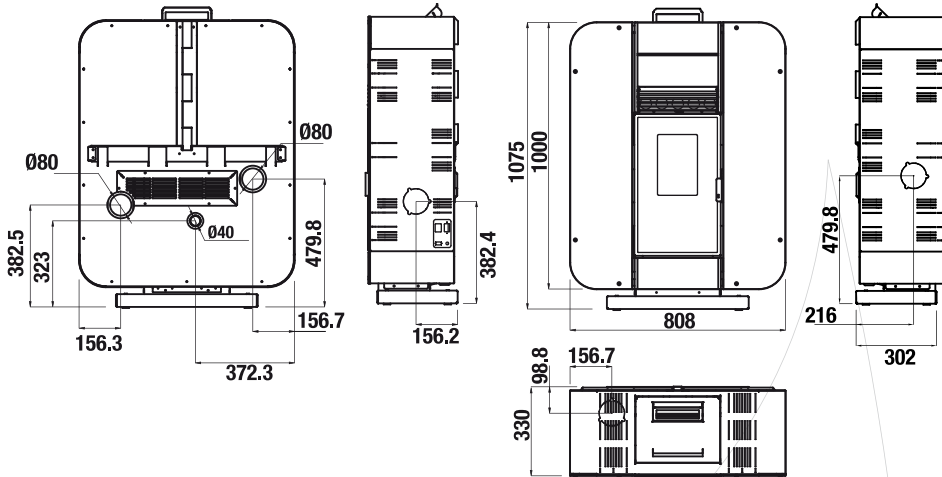

SCARICO FUMI
FUME OUTLET:
A Superiore - Top
B Posteriore - Rear
C Laterale - Side

ARIA CALDA
WARM AIR OUTLET:
D Frontale - Front
E Laterale (canalizzata)
Side (ducted)
F Posteriore (canalizzata)
Rear (ducted)

		XS C.
Dimensioni LxPxH - Dimensions (WxDxH) - Dimensions LxPxH - Abmessungen BxTxH - Dimensiones LxPxH	mm	808 x 330 x 1075
Potenza termica nominale - Rated heat output - Puissance thermique nominale Wärme-Nennleistung - Potencia térmica nominal	kW	3.95 - 8.0
Rendimento potenza termica nominale - Rated thermal efficiency - Rendement puissance thermique nominale Wirkungsgrad Wärme-Nennleistung - Rendimiento potencia térmica nominal	%	89.0
Requisiti minimi del tiraggio del camino potenza termica nominale - Minimum vent draft at rated heat output Conditions minimales du tirage de la cheminée puissance thermique nominale Mindestanforderungen Kaminzug Wärme-Nennleistung - Requisitos mínimos de tiro de la chimenea potencia térmica nominal	Pa	11
Massa - Weight - Masse - Masse - Masa	Kg	130
Diametro raccolta fumi - Diameter of fume outlet - Diamètre récupération des fumées Durchmesser Rauchabzug-Sammelrohr - Diametro raccolta fumi	mm	80
Potenza elettrica nominale - Rated electrical power - Puissance électrique nominale Elektrische Nennleistung - Diámetro tubo humos	W	420
Canalizzabile laterale e posteriore - Ductable, side or rear - Gainable latéralement et à l'arrière Seitlich und hinten kanalisierbar - Canalizable parte lateral y trasera		•
Scarico laterale o superiore o posteriore dei fumi - Side, top or rear fume outlet - Évacuation latérale ou supérieure ou arrière des fumées - Seitlicher, oberer oder hinterer Rauchabzug - Evacuación lateral, superior o trasera humos		•
Capienza serbatoio - Hopper capacity - Capacité réservoir - Seitlicher Rauchabzug - Capacidad del depósito	Kg	20
Consumo orario - Hourly consumption - Consommation horaire - Verbrauch pro Stunde - Consumo horario	Kg/h	0.7 - 1.7